

ZTE-J G730/G740/G750/G780
GoTa Digital Mobile Phone
User Manual

LEGAL INFORMATION

Copyright © 2009 ZTE CORPORATION.

All rights reserved.

No part of this publication may be excerpted, reproduced, translated or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without the prior written permission of ZTE Corporation.

The manual is published by ZTE Corporation. We reserve the right to make modifications on print errors or update specifications without prior notice.

Version No. : V 1.0

Manual No. : 079584500477

Edition Time : 20090807

Contents

General Information	8
Welcome	8
Security	8
Safety Precautions	9
SAR (Specific Absorption Rate)	9
Operational Precautions.....	10
Precautions While Driving	10
Precautions for Medical Devices and Facilities.....	11
Mobile Phone	11
Precautions for Potentially Explosive Atmospheres.....	12
Precautions for Electronic Devices	13
Safety and General Use in Vehicles	13
Aircraft Safety.....	13
Battery Use	14
Getting Started	15
What're Included	15
Technical Parameters	15
Key Definition	16
Icon Introduction.....	18
Battery	19
Installing the Battery	19
Charging the Battery.....	19
Removing the Battery	21
Inserting and Removing UIM Card.....	21
Powering On/Off your Phone	23

Power On	23
Power Off	23
Locking/Unlocking Your Phone	23
Text Input	24
Overview	24
eziEn Mode.....	24
123 Mode.....	24
ABC and abc Mode	25
Making and Receiving PTT Calls	26
Make Private Calls.....	26
Make Group Calls	27
Receive PTT Calls	28
End PTT Calls.....	28
Broadcast Call	29
PTT Emergency Calls.....	29
Functions during PTT Calls	30
Group Members Status Query	30
Group Members Management	30
Upgrade Ordinary Calls to Emergency Calls	30
Switch Sound	31
Watching Function.....	31
Accessory Mode.....	31
Call Attribute.....	32
Dynamic Management	32
Supplement Service	33
Make and Receive Normal Calls.....	35
Make Normal Calls	35
Receive Normal Calls	36

End Normal Calls	36
Functions during Normal Calls	36
Adjust Volume	36
View Book	36
Set Muted	36
Switch Sound	36
Three-way Call	37
Call Waiting	37
Setting	37
Call Forward	37
Call Waiting	38
Emergency	38
Call Answer	38
Dial Restrict	39
Free Dial	39
Phone Book	40
Personal Book	40
View	40
Add	41
Search	41
Delete	42
Set Ringtone	42
Rename	43
Move	43
Check Space	44
Delete All	44
Send Message	44
System Book	45
Call History	46
Call Icons	46
View	46

Delete	47
Delete All	47
Save Number.....	47
Make Normal Calls	47
Make PTT Calls	47
Send Message.....	48
View Phone Book Information	48
SMS.....	49
Compose	49
Send	49
Phrases	49
Save as Draft.....	49
Back	50
Inbox	50
View.....	50
Receive New Message.....	51
Outbox	51
Drafts	51
Delete All	52
Settings.....	52
Preset Messages.....	53
Assistant	54
Alarm Clock	54
Add	54
View / Edit	54
Delete	54
Set Alarm Ring	55
Turn Off Alarm Ring	55
Calculator.....	55

Calendar.....	55
View Event.....	55
View All	56
Add Event	56
Goto	56
Delete	56
Delete All	56
World Time.....	57
Stopwatch	57
General Time Counting.....	57
Record Multiple Time Records in the Counting	57
Settings.....	58
Profiles	58
Change Profile	58
View / Edit Profile.....	58
Phone.....	59
Idle Display	59
Backlight	59
LCD Contrast	60
Language.....	60
Shortcuts.....	60
Personal Info.....	60
Time Format	60
Security	61
Default Reset	62
Appendix.....	63
Fallback.....	63
Troubleshooting	63

General Information

Welcome

Thank you for using ZTE-J G730/G740/G750/G780 GoTa digital mobile phone.

To guarantee the mobile phone always in its best condition, please read this manual carefully and keep it for further use.

The pictures, symbols and contents in this manual are just for your reference. They might not be completely identical with your mobile phone.

Security

To protect your mobile phone from illegal use, take the security measures as follows.

- Set PIN code of the UIM card (if your mobile phone supports UIM card).
- Set handset lock code.
- Set call restrictions.

Safety Precautions

This section includes some important information on safe and efficient operation. Please read this information before using the phone.

SAR (Specific Absorption Rate)

The exposure guidelines for mobile devices employ a unit of measurement known as the Specific Absorption Rate (SAR). The SAR limit stated in the international guidelines is 2.0 watts/kilogram (W/kg) averaged over ten grams of tissue. Tests for SAR are conducted using standard operating positions with the device transmitting at its highest certified power level in all tested frequency bands. The actual SAR level of an operating device can be well below the maximum value because the device is designed to use only the power required to reach the network. That amount changes depending on a number of factors such as how close you are to a network base station.

The highest SAR value when tested according to international testing procedures recommended by International Guidelines for Exposure to Radio Waves (ICNIRP) for use is 2.00 W/kg.

SAR values may vary depending on national reporting and testing requirements and the network band. Use of device accessories and enhancements may result in different SAR values.

Note: The SAR limit of 2W/kg averaged over ten grams of tissue is the permitted level of RF energy for the general population. The standards and guidelines include a substantial safety margin designed to assure the safety of the public, regardless of age and health and to account for any variations in measurements.

Operational Precautions

- Please use your phone properly. When making or answering a call, please hold your phone as holding a wire line telephone. Make sure that the phone is at least one inch (two point five centimeters) from your body when transmitting.
- Do not touch the antenna area when the phone is in use. Touching the antenna area affects call quality and may cause the phone to operate at a higher power level than needed.
- Some people may be susceptible to epileptic seizures or blackouts when exposed to flashing lights, such as when watching television or playing video games. If you have experienced seizures or blackouts, or if you have a family history of such occurrences, please consult your doctor before playing video games on your phone or enabling a flashing-light feature on your phone. (The video games and flashing-light features are not available on all products.)
- Keep the phone out of the reach of small children. The phone may cause injury if used as a toy.

Precautions While Driving

- Please pay attention to the traffic safety. Check the laws and regulations on the use of your phone in the area where you drive. Always obey them.
- Use hands-free function of the phone, if available.
- Pull off the road and park before making or answering a call if conditions require.

Precautions for Medical Devices and Facilities

- When using your phone near pacemakers, please always keep the phone more than eight inches (twenty centimeters) from the pacemaker when the phone is switched on. Do not carry the phone in the breast pocket. Use the ear opposite the pacemaker to minimize the potential for interference. Switch off the phone immediately if necessary.
- Some phones may interfere with some hearing aids. In the event of such interference, you may consult your hearing aids manufacturer to discuss alternatives.
- If you use any other personal medical device, please consult the manufacturer of your device to determine if it is adequately shielded from RF energy.
- In those facilities with special demand, such as hospital or health care facilities, please pay attention to the restriction on the use of mobile phone. Switch off your phone if required.

Mobile Phone

- Please use original accessories or accessories approved by the phone manufacturer. Using any unauthorized accessories may affect your mobile phone's performance, damage your phone or even cause danger to your body and violate related local regulations about telecom terminals.
- Turn off your phone before you clean it. Use a damp or anti-static cloth to clean the phone. Do not use a dry cloth or electrostatically charged cloth. Do not use chemical or abrasive cleaners as these could damage the phone.
- As your mobile phone can produce electromagnetic field, do not place it near magnetic items such as computer disks.

- Using the phone near electrical appliances such as TV, telephone, radio and personal computer can cause interference.
- Do not expose your mobile phone to direct sunlight or store it in hot areas. High temperatures can shorten the life of electronic devices.
- Keep your phone dry. Any liquid may damage your phone.
- Do not drop, knock or harshly treat the phone. Rough handling can break internal circuit boards.
- Do not connect the phone with any incompatible enhancement.
- Do not attempt to disassemble the mobile phone or battery.
- Do not store the phone with flammable or explosive articles.
- Do not charge the mobile phone without battery.

Precautions for Potentially Explosive Atmospheres

- Switch off your phone prior to entering any area with potentially explosive atmospheres, such as fueling areas, fuel or chemical transfer or storage facilities.
- Do not remove, install, or charge batteries in such areas. Spark in a potentially explosive atmosphere can cause an explosion or fire resulting in bodily injury or even death.
- To avoid possible interference with blasting operations, switch off your phone when you are near electrical blasting caps, in a blasting area, or in areas posted "Turn off electronic devices." Obey all signs and instructions.

Precautions for Electronic Devices

- Some electronic devices are susceptible to electromagnetic interference sent by mobile phone if inadequately shielded, such as electronic system of vehicles. Please consult the manufacturer of the device before using the phone if necessary.

Safety and General Use in Vehicles

- Safety airbag, brake, speed control system and oil eject system shouldn't be affected by wireless transmission. If you do meet problems above, please contact your automobile provider. Do not place your phone in the area over an airbag or in the airbag deployment area. Airbags inflate with great force. If a phone is placed in the airbag deployment area and the airbag inflates, the phone may be propelled with great force and cause serious injury to occupants of the vehicle.
- Please turn off your mobile phone at a refueling point, and the same to the place where the use of two-way radio is prohibited.

Aircraft Safety

- Please turn off your mobile phone before the airplane takes off. In order to protect airplane's communication system from interference, it is forbidden to use mobile phone in flight. Safety regulations require you to have permission from a crew member to use your phone while the plane is on the ground.
- If the mobile phone has the function of automatic timing power-on, please check your alarm setting to make sure that your phone will not be automatically turned on during flight.

Battery Use

- Do not short-circuit the battery, as this can cause the unit to overheat or ignite.
- Do not store battery in hot areas or throw it into fire. Otherwise, it will cause explosion.
- Do not disassemble or refit the battery. Otherwise, it will cause liquid leakage, overheating, explosion and ignition of the battery.
- Please store the battery in a cool dry place if you don't use it for a long period.
- The battery can be recharged for hundreds of times, but it will eventually wear out. When the operating time (talk time and standby time) is noticeably shorter than normal, it is time to replace it with a new one.
- Please stop using the charger and battery when they are damaged or show evidence of aging.
- Return the worn-out battery to the provider or dispose of it in accordance with environment regulations. Do not dispose of it in household rubbish.
- Only use the original batteries. Using any unauthorized battery may affect your handset performance or may cause danger of explosion, etc.

Warning:

If the battery is damaged, do not discharge it. If the leakage does come into contact with the eyes or skin, wash thoroughly in clean water and consult a doctor.

Getting Started

What're Included

Your mobile phone package should contain the following items. Check the box carefully to ensure all items are present.

- Handset
- Battery
- Clip
- User manual and literature pack
- AC desktop charger

Technical Parameters


Model	ZTE-J G730/G740/G750/G780
Dimensions (L * W * H)	188 mm * 65 mm * 38 mm (without clip)
Weight	350 g (including battery)
Continuous Standby Time	About 240 hours
Continuous Talk Time	About 600 minutes



Notes:

The real continuous standby time and talk time data are subject to the real network conditions.

Key Definition

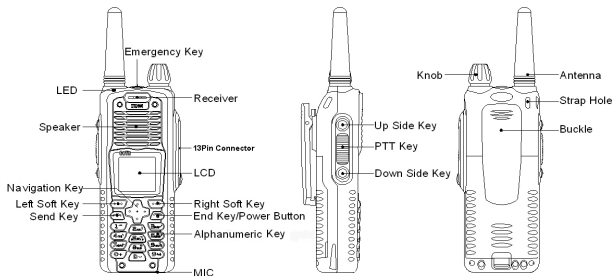

Name	Description
Left Soft Key	Correspond to the words in the bottom left corner of the screen.
Right Soft Key	Correspond to the words in the bottom right corner of the screen.
Send Key	- Used to dial or receive the calls. - Shortcut to view call history.
End Key	- Used to power on and off. - End calls. - Reject calls. - Back to standby mode.
Navigation Keys (Up / Down / Left Right Key)	- Used to move the highlight or cursor. - Use Up/Down Key to change the system group without the speech play in standby mode. - Use Left/Right Key to access your preset shortcut.

Name	Description
0 ~ 9 Alphanumeric Keys	• Used to input numbers or letters. • Used to select menu items quickly.
* Key	• Used to input *. • Used to open symbol list in text input mode.
# Key	• Used to input #. • Used to switch text input modes.
PTT Key	• Make PTT calls. During the call, hold the key to speak, and release it to listen.
Up Side Key	• Hold the key to turn on or off the phone speaker in standby mode. • Press the key to play the speech of current group numbers, and rotate the Top Knob or Up/Down Key at the moment to adjust the current volume of the phone.
Down Side Key	• Access to Set Watching Group interface by pressing it in standby mode. • Turn on or off the Watching Function in standby mode by holding it. • Turn on or off the screen display during calls by holding it.
Emergency Key	• Make emergency calls.
Top Knob	• Rotate it to switch among the groups which you had joined and play the speech of the group numbers. • Press the Up Side Key first to get into volume adjustment interface, and then rotate the key to adjust the volume of the phone.


Icon Introduction

	Network signal strength
	Battery capacity
	Fallback
	Watching function
	Speaker
	New short message
	New short message and missed call
	Vibration status
	Silence mode
	Alarm clock
	Roaming
	Power off
	Away
	Call forwarding
	Out of service area
	Call restricted


Battery

Installing the Battery

1. Place the upper section of the battery into position.



2. Push down on the lower section of the battery until it clicks into place.
3. Install the battery cover.



Charging the Battery

Your phone is powered by a rechargeable battery. The battery is not fully charged when you purchase your phone, but there may be enough power in the battery to switch the phone on.

For maximum battery performance, it is recommended that you charge the battery for eight hours for the first three times. A new battery's full performance is achieved only after three complete charging and discharging cycles.

⚠ Warning:

- Put the phone at a ventilated place with temperature between + 5°C and + 40°C. Use only the supplied or approved chargers. Using unauthorized charger may cause danger and violate the authorization and warranty rules of the phone.
 - Charge the battery in time when your phone automatically powers off or displays a warning "Battery low".
 - Do not charge the battery more than 24 hours continuously.
 - The talk time and standby time of the phone lie on ideal working environments. In practice, the battery working time varies with different network conditions, working environments and modes.
1. Insert the phone or battery into the charger compartments.



2. Connect the charger to an appropriate electrical outlet. The red light on the charger will turn on.

When the charging is completed, the indicating light will turn to green. Normally, during the charging process, your phone, battery and charger may become hot.

Disconnect the charger with the phone, battery and power outlet after charging.

Removing the Battery

1. Switch off your phone and disconnect the charger with it before removing the battery.
2. Pull down the battery cover lock and take out the battery cover.



3. Lift the battery from the compartment and remove it.



Inserting and Removing UIM Card

Switch off your phone, disconnect the outer power source and remove the battery.



Notes:

- It is forbidden to insert or remove the UIM card when it is on or connected to an outer power source.
 - Contact your operator to check whether your phone supports UIM card.
3. Insert the UIM card into the slot by aligning the metal contacts area of the UIM card with the metal contacts in the slot on the phone.



4. Pull the UIM card out from the slot.



Powering On/Off your Phone

Power On

1. Hold the **End Key** to power on the phone.

The mobile phone will automatically test whether the UIM card is plugged in and valid after power on.

2. Enter correct PIN code and select **OK** to confirm (if a UIM card password has been set).



Notes:

The PIN code of UIM card will be provided to you with UIM card together. If not, please consult your network service provider. It's recommended to change it as soon as possible.

Power Off

Hold the **End Key** to power off the phone.

Locking/Unlocking Your Phone

You can lock your phone to avoid disoperation to your keypad when putting your phone in package or bag.

1. Press the **Left Soft Key** and **# Key** to lock the phone.
2. Select **Unlock** and press the **# Key** to unlock the phone.

Text Input

Overview

Your mobile phone provides the following input methods: upper-case and lower-case input, numeric input and predictive text input.

When you are in a field that allows characters to be input, you will notice the text input mode indicator in the top right corner of the screen. Press the **# Key** to switch among different input modes.

eziEn Mode

It is a predictive text input mode. You can input any letter with a single key press. The predictive text input is based on a built-in dictionary. To write a desired word, press the keys 2 to 9.

1. Select **eziEn** mode.
2. Press keys to input desired words.
3. Use the **Up/Down Key** to select the desired predictive word.
4. Select **OK** to input the desired word, or press the **0 Key** to input the word and a space at the same time.
5. Press the *** Key** to open a list of special characters, and use the **Number Keys** to select a character.



Notes:

In eziEn mode, pressing the 1 Key can only input a full stop.

123 Mode

- The 123 mode enables you to input numbers in a text message.
- Press the keys corresponding to the required digits.
- If you want to input a space, switch to other input methods and press the **0 Key**.

ABC and abc Mode

Use the number keys from 2 to 9 to input your text.

1. Press the key labeled with the required letter.
 - Once for the first letter
 - Twice for the second letter
 - And so on
2. Press the **0 key** once to insert a space. To delete letters, select **Clear**.
3. Press the *** Key** to open a list of special characters, and use the **Number Keys** to select a character.

Press the **2 key** once to input “a”, twice to input “b”, three times to input “c” and four times to input “2”, then continue pressing will start a new loop from “a” to “2”.

Making and Receiving PTT Calls

Adopting the method of Push-to-Talk, PTT calls are different from normal calls.

PTT calls could be classified into **Private Calls** and **Group Calls**.

PTT private calls provide one-to-one voice call service in CDMA network service area with PTT functions. Each PTT mobile phone has a unique PTT number, namely PTT private number. Dialing this number in PTT mode could make PTT private calls. You could save and view this number in **Personal Book**.

PTT group calls provide one-to-many voice group call service in CDMA network service area with PTT functions. Each group has a unique group number to differentiate with other groups. Dialing this number in PTT mode could make PTT group calls. You could view the system name and number in **System Book**.

With regard to call priority levels, PTT calls could fall under three categories: **Emergency Calls**, **Pre-emptive Priority Calls** and **Ordinary Calls**, among which Emergency Calls have the highest priority, and Pre-emptive Priority Calls have higher priority than Ordinary Calls (refer to “Call Attribute” for detailed settings).

Make Private Calls

You could make private calls by the following three means:

- Dial directly;
- Dial from book;
- Dial from call history.

1. Dial Directly

- i Input the desired PTT number in standby mode;
- ii Hold the **PTT Key** to start dialing, and talk after hearing a beep sound;
- iii Release the **PTT Key** to listen to the other party.

2. Dial from Book

- i Select **Book** in standby mode to access the phone book interface, and use the **Up/Down Key** to select **Personal Book**;
- ii Press the **Up/Down Key** to select your desired contact;
- iii Hold the **PTT Key** to start dialing, and talk after hearing a beep sound;
- iv Release the **PTT Key** to listen to the other party.



Notes: If you can not make a call after holding the PTT Key, it means that there is no PTT private number for your current contact.

3. Dial from Call History

- i Press the **Send Key** or select **Menu > Call History** to display the call history list in standby mode;
- ii Press the **Up/Down Key** to select your desired private call record;
- iii Hold the **PTT Key** to start dialing, and talk after hearing a beep sound;
- iv Release the **PTT Key** to listen to the other party.

Make Group Calls

You could make group calls by the following three means:

- Dial directly
- Dial from book
- Dial via system group

1. Dial Directly

- i Press the **# Key** and then input the desired group numbers in standby mode;
- ii Hold the **PTT Key** to start dialing, and talk after hearing a beep sound;
- iii Release the **PTT Key** to listen to the other members.

2. Dial from Book

- i Select Book in standby mode to access the phone book;
- ii Use the Up/Down Key to select System Book;
- iii Press the Up/Down Key to select your desired group;
- iv Hold the PTT Key to start dialing, and talk after hearing a beep sound;
- v Release the PTT Key to listen to the other members.

3. Dial via System Group

- i If your phone belongs to several system groups, rotate the Top Knob to switch among system groups in standby mode;
- ii Hold the PTT Key to make a group call;
- iii Release the PTT Key to listen to the other members.

Receive PTT Calls

1. When receiving PTT calls, you will firstly hear a short beep sound, and then hear the other members speak without any operation.
2. After the members finish speaking, hold **PTT Key** and speak after hearing beep sound. Release **PTT Key** to listen to the other members.

End PTT Calls

1. Exit from a Group Call

You could exit from a group call in the process while others continue the conversation.

- i Press the **End Key** to exit from a PTT group call.

2. End a Group Call

All members in the group will exit from the group call after it is ended.



Notes: Only the group caller or group leader has the authority to end a group call.

- i Select **Option > End Call** to end a group call.

3. End a Private Call

- i Press the **End Key** to end a private call.

Broadcast Call

Broadcast call is a unilateral call. It broadcasts the call to the group members. The group members can receive the call but are not allowed to answer the call.

1. Press the **# Key** twice in standby mode;
2. Input the group number;
3. Hold the **PTT Key** to start the broadcast call and talk after hearing a beep sound.

PTT Emergency Calls

With the highest priority, emergency calls could be made through the **Emergency Key**.

You can make the emergency call by the following means.

In standby mode, input the emergency number for PTT private call, or press the **# Key** and input the emergency number for PTT group call, then hold the **Emergency Key** to make the call.

In **Call History** interface, select a call number and hold the **Emergency Key** to make the call.

In **Book** interface, select a call number and hold the **Emergency Key** to send the call.

In standby mode, hold the **Emergency Key** to make the emergency call which has been preset (refer to section *Emergency* for details).

During PTT calls, select **Upgrade call** to upgrade the PTT call to emergency call.

Functions during PTT Calls

Group Members Status Query

1. Offline Members Status Query

During PTT calls, you could inquire the status of those uncalled members (offline members) in the group.

- i Select **Option > OfflMembStat** to view the list of offline members;
- ii Press the **Up/Down Key** to turn pages;
- iii Select **Back** to return to the call interface.

2. Group Members Status Query

During PTT calls, you could inquire the status of all members in the current group.

- i Select **Option > GrMembStat** to get into the group member status interface;
- ii Select **View** to view the detailed list of members;
- iii Select **Next** or press the **Up/Down Key** to turn pages;
- iv Select **Back** to return to the call interface.

Group Members Management

During PTT calls, you could manage the members in the group.

Select **Option > DynaManagement** to perform corresponding operations (for details, refer to section *Dynamic Management*).

Upgrade Ordinary Calls to Emergency Calls

You could upgrade ordinary calls to emergency calls by the two means.

During PTT calls, select **Upgrade call** to upgrade the call

During PTT calls, press the **Emergency Key** to upgrade the call

Switch Sound

During PTT calls, you could hear the sound either from the speaker or earpiece.

During PTT calls, hold the **Up Side Key** to turn on or off the speaker.

Watching Function

If you have the authority for watching, you can start your watching settings. This feature makes your phone only receive the group calls which are set in the current watching list. Other group calls not in the list will be neglected except the Emergency Calls and Pre-emptive Priority Calls.

1. Start Watching

- i In standby mode, select **Menu > PTT Functions > Watching Function > Watching Status**. The default watching status is **Off**. You should set the watching groups among all groups which the phone had joined in. There are only four groups can be set as the watching groups at the same time

2. Set Watching Group

- i Select **Watching Group** to display the available groups you can watch, or press the **Down Side Key** in standby mode to get into watching setting interface;
- ii Press the **Up/Down Key** to select desired group and select **Mark**, then the marked group will be set as the watching group. If you had turn on the watching status, it will start watching when you mark it.

Accessory Mode

The phone provides two accessory modes for you: **PTT Mode** and **Voice Mode**.

1. In standby mode, select **Menu > PTT Functions > Accessory Mode**;
2. Press the **Up/Down Key** to select **PTT Mode** or **Voice Mode**.

 **Notes:** In PTT Mode, you can use the PTT Key on the headset or monophone to make a PTT call by pressing it. In Voice Mode, you can use the PTT Key on the headset or monophone to make a normal voice calls by pressing it and make a PTT call by holding it.

Call Attribute

After the call attribute is set, the PTT call made by the phone will be Ordinary PTT Call or Pre-emptive Priority PTT Call.

1. In standby mode, select **Menu > PTT Functions > Call Attribute**;
2. Press the **Left/Right Key** to select **Normal** or **Pre-emptive**;
3. Select **Save** to save the setting.

Dynamic Management

You could add or delete the group members, set the priority of group members, and set the talk time.

 **Notes:** Only the group leader has the authority to perform dynamic management.

Add/Delete Group Member

1. In standby mode, select **Menu > PTT Functions > DynaManagement > Add (Delete) Member**;
2. Enter the **Group Number** and **Member Number**, or select **Option > Book** to select number from phone book;
3. Select **Option > Save** to save the setting.

Set Priority

1. In standby mode, select **Menu > PTT Functions > DynaManagement > Set Priority**;
2. Enter the **Group Number** and **Member Number**, or select **Option > Book** to select number from phone book;
3. Press the **Left/Right Key** to select **Senior**, **Junior**, **Sophomore** or **Fresher**;

4. Select **Option > Save** to save the setting.

Set Talk Time

1. In standby mode, select **Menu > PTT Functions > DynaManagement > Set Talk Time**;
2. Enter the **Group Number** and **Member Number**, or select **Option > Book** to select number from phone book;
3. Press the **Number Keys** to set your desired talk time;
4. Select **Option > Save** to save the setting.

Supplement Service

Supplement service supplies some additional PTT call services, such as PPT private call forward, PTT call number identity restriction, and so on.

Private Call Forward

After **Private Call Fwd** is activated, you could forward all incoming PTT private calls to the number you set. You could perform the corresponding settings and query in the phone.



Notes: The forward number you set should be a PTT call number.

1. In standby mode, select **Menu > PTT Functions > Supplement Svc > Private Call Fwd**;
2. Select **On** to activate this function; if you select **On**, you need to enter a forward number, and select **OK** to save;
3. Select **Off** to deactivate this function;
4. Select **Query** to check if the function is activated or deactivated.

Group Member Status Query

After **GrMembStatQry** is activated, you could query the status of group members during PTT group calls (refer to section *Functions during PTT Calls* for details).

1. In standby mode, select **Menu > PTT Functions > Supplement Svc > GrMembStatQry**;

2. Select **On** to activate this function;
3. Select **Off** to deactivate this function;
4. Select **Query** to check if the function is activated or deactivated.

Duty Number

After **On Duty** is selected and duty number is entered, you could receive the call at the same time if other users dial the number.

1. In standby mode, select **Menu > PTT Functions > Supplement Svc > Duty Number**;
2. Select **On Duty** and input the duty number, then select **OK** to activate this function;
3. Select **Off Duty** and input the duty number, then select **OK** to deactivate this function;
4. Select **Query** and input the duty number to check if the function is activated or deactivated.

PTT Call Number Identity Restriction

After **PTT CNIR** is activated, other users could not see your number when you make a PTT call.

1. In standby mode, select **Menu > PTT Functions > Supplement Svc > PTT CNIR**;
2. Select **On** to activate this function;
3. Select **Off** to deactivate this function;
4. Select **Query** to check if the function is activated or deactivated.

Call Alert Busy

After **Call Alert Busy** is activated, there is a prompt in the interface during the conversation if there is a second incoming call.

1. In standby mode, select **Menu > PTT Functions > Supplement Svc > Call Alert Busy**;
2. Select **On** to activate this function;
3. Select **Off** to deactivate this function;
4. Select **Query** to check if the function is activated or deactivated.

Make and Receive Normal Calls

Make Normal Calls

Normal call means traditional CDMA voice phone call which you usually make.

You could make normal calls by the following three means:

- Dial directly;
- Dial from book;
- Dial from call history.

1. Dial Directly

- i Input the desired phone number in standby mode;
- ii Press the **Send Key** to dial.

2. Dial from Book

- i Select **Book** in standby mode to access the phone book, and press the **Up/Down Key** to select **Personal Book**;
- ii Press the **Up/Down Key** to select your desired contact;
- iii If there are several phone numbers, press the **Up/Down Key** to select your desired number;
- iv Press the **Send Key** to dial.

 **Notes:** If the dialed number is a short PTT private number, pressing the Send Key will not dial this number.

3. Dial from Call History

- i Press the **Send Key**, or select **Menu > Call History** to display the call history list in standby mode;
- ii Press the **Up/Down Key** to select your desired normal call record;
- iii Press the **Send Key** to dial.

Receive Normal Calls

Press the **Send Key** to receive an incoming call.

End Normal Calls

When you are making a call or already in a conversation, press the **End Key** to end it.

Functions during Normal Calls

Adjust Volume

You could adjust volume during calls by the following means:

Press the **Up/Down Key** to adjust volume;

Rotate the **Top Knob** to adjust volume.

View Book

During calls, select **Book** to access to the phone book interface. You could inquire, add, edit, or delete phone numbers (see *Phone Book* for details).

Set Muted

Select **Option > Muted (Unmute)** during calls.

If you select **Muted**, the word “Muted” will appear on the screen, and the other side could not hear your voice.

If you select **Unmute**, you will exit from mute mode, and the other side could hear your voice again.

Switch Sound

You could receive the call either from the speaker or earpiece.

Hold the **Up Side Key** to turn on or off the speaker during calls.

Three-way Call

Your phone has a three-way call feature, which enables you to have conference calls with two parties.

Make sure that you have got the service support from operator.

1. Dial a call to set up a normal call connection;
2. In the call screen, enter the number of the third party directly;
3. Press the **Send Key** to call the third party and complete another call connection;
4. Press the **Send Key** again to make the first party join the conversation.

Call Waiting

The call waiting feature enables you to receive new incoming calls when you are already in a call conversation.

Make sure that your network operator supports this service.

1. You have a conversation with party A now;
2. A new call from party B coming, it will prompt a tip on your conversation screen;
3. Press the **Send Key** to hold on the call with party A and get the party B call;
4. During the conversation, use the **Send Key** to select the party and talk to it.

Setting

Call Forward

This function enables you to forward incoming normal calls to another phone number.

Network support is required.

1. In standby mode, select **Menu > Settings > Call > Call Forward**;

2. Press the **Up/Down Key** to select **All Calls**, **Busy**, **No Answer**, or **Not Reachable**;
3. Select **On** or **Off**;
4. If you select **On**, input the forward number, and select **OK**;
5. Select **Cancel All** to cancel all set call forwards.

Call Waiting

When the function is activated, you can switch to the second incoming call by pressing the **Send Key** when you are already in a call.

Network support is required.

1. In standby mode, select **Menu > Settings > Call > Call Waiting**;
2. Select **On** to activate the function and select **Off** to deactivate the function.

Emergency

You could hold the **Emergency Key** to make emergency call in standby mode after the emergency number is set.

1. In standby mode, select **Menu > Settings > Call > Emergency**;
2. Press the **Left/Right Key** to select the type as **Group**, **Private**, or **Normal**;
3. Press the **Down Key** to move the cursor to **Emergency No.**, and press the **Number Keys** to input number directly or select **Option > Book** to select number from phone book;
4. Select **Option > Save** to save the setting.

Call Answer

1. In standby mode, select **Menu > Settings > Call > Call Answer**;
2. Press the **Up/Down Key** to select **Send Key** or **Any Key** to answer calls.

Dial Restrict

When this function is activated, you could not dial any number except emergency number and free dial numbers.

1. In standby mode, select **Menu > Settings > Call > Dial Restrict**;
2. Input the password and select **OK** to confirm;
3. Press the **Up/Down Key** to select **Dial Restrict**;
4. Press the **Up/Down Key** to select **On** or **Off** to activate or deactivate this function.

Free Dial

You could set up to ten free dial numbers. If **Dial Restrict** is activated, these numbers are not restricted.

1. In standby mode, select **Menu > Settings > Call > Dial Restrict**;
2. Input the password and select **OK** to confirm;
3. Press the **Down Key** to select **Free Dial**;
4. Press the **Up/Down Key** to select a number, and input the desired number for free dial, and select **OK** to save the setting.

Phone Book

The phone book could be classified into **Personal Book** and **System Book**. **Personal Book** manages the name and phone number of the contacts; **System Book** manages PTT group names and PTT group numbers.

Personal Book

The contacts in personal book could be saved either in phone or UIM card.

There might be several phone numbers for each contact saved in phone, such as PTT private number, home number, office number, and mobile phone number. "Privt.ID" is PTT private number of the contact.

There is only one phone number for each contact saved in UIM card. For easy search, you could classify your contacts into several groups, like **Family**, **Friends**, etc.

Icon	Description	Icon	Description
	Name		PTT Private Number
	Home Number		Office Number
	Mobile Phone Number		Other Phone Number
	Remarks		Preferred Number
	Ring		Group

View

1. In standby mode, select **Book > Personal Book**;
2. Press the **Up/Down Key** to select the desired contact;

3. Select **Option > View** to view the details of the contact.

Add

1. In standby mode, select **Book > Personal Book**, and select **Option > Add**;
2. Select location as **Phone** or **UIM**, and edit (if your phone does not support UIM card, skip the step).

In phone

- i Press the **Up/Down Key** to scroll the highlight, and edit each highlighted item.
- ii Select **Save** to save the contents.



Notes:

After the preferred number is set, it will be dialed if you use the Send Key to dial from book.

When inputting contents, press the # Key to switch among input methods, and press * Key to input symbols. Refer to *Text Input* for details on input methods.

In UIM

- i Press the **Up/Down Key** to scroll the highlight, and edit the contact name and number.
- ii Select **Save** to save the contents.

Search

The phone provides four methods for searching contacts.

1. Direct Search

- i Select **Book > Personal Book** in standby mode;
- ii All contacts in **Personal Book** will be listed; press the **Up/Down Key** to search your desired contact.

2. Search by Name

- i Select **Book > Personal Book** in standby mode;

- ii Select **Option > Srch by Name;**
- iii Enter content and select OK to search all contacts matching the search condition;
- iv Press the **Up/Down Key** to select the contact you desire.

3. Search by Group

- i Select **Book > Personal Book** in standby mode;
- ii Select **Option > Srch by Group;**
- iii Press the **Up/Down Key** to select your desired group, and then select **Option > View** to view all contacts in the group;
- iv Press the **Up/Down Key** to select the contact you desire.

4. Fast Matching Search

- i Select **Book > Personal Book** in standby mode;
- ii Input the first letter of the contact name;
- iii The highlighted name will be the first matching contact;
- iv Press the **Up/Down Key** to search your desired contact.

Delete

- 1. Firstly find the contact you want to delete (see *Search* for details);
- 2. Select **Option > Delete;**
- 3. Select **Yes** to confirm the deletion.

Set Ringtone



Notes: If the incoming call number is saved in Personal Book, the incoming call ringtone will be the group ringtone here, rather than the ringtone you set in Profiles.

- 1. Select **Book > Personal Book** in standby mode;
- 2. Select **Option > Srch by Group;**
- 3. Press the **Up/Down Key** to select the group for which you want to set ringtone;
- 4. Select **Option > Set Ringtone;**

5. Press the **Up/Down Key** to select your desired group ringtone.

Rename

1. Select **Book > Personal Book** in standby mode;
2. Select **Option > Srch by Group**;
3. Press the **Up/Down Key** to select the group you want to rename;
4. Select **Option > Rename**;
5. Input the new name and select **OK** to save it.

Move

1. Move the Record from Phone to UIM

- i Select **Book > Personal Book** in standby mode;
- ii Press the **Up/Down Key** to select the contact record you want to move;
- iii Select **Option > Move > To UIM**;
- iv Select **Yes** to confirm;
- v Select **Yes** to keep original entry.



Notes: When there are several numbers in the record, then each number will be saved as one single record in UIM card.

2. Move the Record from UIM to Phone

- i Select **Book > Personal Book** in standby mode;
- ii Press the **Up/Down Key** to select the contact record you want to move;
- iii Select **Option > Move > To Phone**;
- iv Select **Yes** to confirm;
- v Select **Yes** to keep original entry;
- vi Press the **Left/Right Key** to select the type of number.

3. Move All Entries to UIM

- i Select **Book > Personal Book** in standby mode;

- ii Select **Option > Move > All To UIM**;
- iii Select **Yes** to confirm;
- iv Select **Yes** to keep original entries.



Notes: If the length of name or number record in the phone book exceeds the maximum length in UIM card, the records can not be transmitted to each other.

4. Move All Entries to Phone

- i Select **Book > Personal Book** in standby mode;
- ii Select **Option > Move > All To Phone**;
- iii Select **Yes** to confirm;
- iv Select **Yes** to keep original entries;
- v Press the **Left/Right Key** to select the type of number.

Check Space

- 1. Select **Book > Personal Book** in standby mode;
- 2. Select **Option > Check Space**;
- 3. Select **Phone** to check the phone space and select **UIM** to check the UIM card space.

Delete All

- 1. Select **Book > Personal Book** in standby mode;
- 2. Select **Option > Delete All**;
- 3. Select **Phone** or **UIM**;
- 4. Select **Yes**, input the password and select **OK** to delete all entries in phone or UIM card.

Send Message

- 1. Select **Book > Personal Book** in standby mode;
- 2. Press the **Up/Down Key** to select the contact to whom you want to send message;

3. Select **Option > Send Message**;
4. Input the message content, and select **Option > Send to**
If you want to add more recipients, press the **Up/Down Key**, and select **Book** to add recipients.
5. Select **Option > Send** to send the message.

System Book

Besides **Personal Book** to save private calls and normal call numbers, you also have **System Book** for group calls. **System Book** could save up to 20 entries, which are updated automatically by the system, and normal users are allowed to view the entries, but not to edit, you can set the groups which you want to watch. Only the group leader has the authority of dynamic group management in system book.

1. Setting Watching Group

- i Highlight a group in the system book;
- ii Select **Option > Mark** to start the watching group, or select **Unmark** to cancel the watching.



Notes: You should apply for the watching authority before you use the function of setting watching group.

2. Viewing the Group

- i Highlight a group in the system book;
- ii Select **Option > View** to view the information about group name and group number.

3. Dynamic Management of System Book

If you have the authority of dynamic management, you can add, delete, set the priority and talk time to the group in system book.

- i Highlight a group in the system book;
- ii Select **Option > DynaManagement** to access to dynamic management interface. Refer to *Dynamic Management* for detailed operations.

Call History

Recent incoming calls, missed calls and outgoing calls are saved in **Call History**. The earliest call record will be deleted automatically when there are full of records.

Call Icons

Icon	Description
	Incoming calls
	Missed calls
	Outgoing calls
	PTT calls

View

There are two methods to view call history.

View from Menu

1. In standby mode, select **Menu > Call History**;
2. Press the **Up/Down Key** to select your desired category;
3. Press the **Up/Down Key** to select the record you want to view, and select **Option > View** to view the details.

Quick View

1. In standby mode, press the **Send Key** to view the **Call History** list;
2. Press the **Up/Down Key** to select the record you want to view, and select **Option > View** to view the details.

Delete

1. Access to the list interface of call records (see *View* for reference);
2. Press the **Up/Down Key** to select the record you want to delete, select **Option > Delete**, and select **Yes** to confirm the deletion.

Delete All

1. Access to the list interface of call records (see *View - View from Menu* for reference);
2. Select **Option > Delete All**;
3. Select **Yes** to delete all call records in the current category.

Save Number

1. Access to the list interface of call records (see *View* for reference);
2. Press the **Up/Down Key** to select the record you want to save, and select **Option > Save Number** to save it in phone or UIM card.

Make Normal Calls

1. Access to the list interface of call records (see *View* for reference);
2. Press the **Up/Down Key** to select the normal call record you want to dial;
3. Press the **Send Key** to call.

Make PTT Calls

1. Access to the list interface of call records (see *View* for reference);
2. Press the **Up/Down Key** to select the PTT call record you want to dial;
3. Hold the **PTT Key**, and speak after hearing a beep sound.

Send Message

1. Access to the list interface of call records (see *View* for reference);
2. Press the **Up/Down Key** to select the normal call record you want to send message;
3. Select **Option > Send Message** to send message.

View Phone Book Information

1. Access to the list interface of call records (see *View* for reference);
2. Press the **Up/Down Key** to select a call record you want to view phone book information;
3. Select **Option > Book** to view.

SMS

Compose

Send

1. In standby mode, select **Menu > SMS > Compose Msg**;
2. After entering the text, select **Option > Send to** to edit the recipient;
3. Directly input the recipient's number, or select **Book** to select your desired recipient with the **Up/Down Key**;
4. After entering or selecting the recipient, select **Option > Send** to send the message.

Phrases

1. In standby mode, select **Menu > SMS > Compose Msg**;
2. Select **Option > Preset Msgs.**;
3. Press the **Up/Down Key** to select your desired preset message, and select **OK**;
4. Edit the short message in your need, and select **Send to** to send the message (see *Send* for details).

Save as Draft

1. In standby mode, select **Menu > SMS > Compose Msg**;
2. After entering the text, select **Option > Save as Draft** to save the message in **Drafts**.

Back

1. In the editing interface of **Compose Msg**, select **Option > Back**, and you can cancel the message editing and return to the **SMS** interface;
2. Select **Yes** to save the message before exit; select **No** to exit without saving.

Inbox

Icon	Description
	Unread messages in phone
	Read messages in phone
	Unread messages in UIM card
	Read messages in UIM card

View

1. In standby mode, select **Menu > SMS > Inbox**;
2. Press the **Up/Down Key** to select the message you want to view, and select **View** to view it;
3. In the viewing interface, press the **Up/Down Key** to view the whole message; press the **Left/Right Key** to view the next or previous message;
4. Select **Option > Reply** to reply the message;
5. Select **Option > Forward** to forward the message (see *Send* for details);
6. Select **Option > Save Number** to save the sender number and the numbers in message (see *Phone Book* for details);
7. Select **Option > Delete**, and select **Yes** to delete the message;
8. Select **Option > Move to UIM (Phn)** to move the message to UIM card or phone.



Notes: Move to UIM (Phn) is available only for the phones supporting UIM card.

Receive New Message

Your phone will alert upon receipt of a new message in standby mode. Select **View** to get into **Inbox** to view the new message. If there are unread messages in the inbox, the icon of unread messages will display in the status bar of the standby screen.

Outbox

If the **Auto Save** is set as **Yes**, you could view all sent messages in the **Outbox**.

1. In standby mode, select **Menu > SMS > Outbox**;
2. Press the **Up/Down Key** to select the message you want to view, and select **View** to view it;
3. During viewing, press the **Up/Down Key** to view the whole message; press the **Left/Right Key** to view the next or previous message;
4. Select **Option > Forward** to forward the message (see *Send* for details);
5. Select **Option > Delete**, and select **Yes** to delete the message;
6. Select **Option > Save Number** to save the receiver's number and the numbers in message (see *Phone Book* for details).

Drafts

In the **Drafts**, you could view the messages which are not sent. You could send it again after editing.

1. In standby mode, select **Menu > SMS > Drafts**;
2. Press the **Up/Down Key** to select the message you want to view, and select **Option > View** to edit it;
3. After editing, select **Option > Send to** to send it (see *Send* for details);

4. Select **Option > Preset Msg.** to add preset message;
5. Select **Option > Save as Draft** to save it in the drafts (see *Compose* for details).
6. Select **Option > Back** to return to the **Drafts** interface.

Delete All

Your phone can clear the messages in the **Inbox**, **Outbox** and **Drafts**.

1. In standby mode, select **Menu > SMS > Delete All**;
2. Press the **Up/Down Key** to select the desired message box or message storage location;
3. Select **Yes** to delete.

Settings

1. Set Auto Save

Your phone has the feature to save the sent messages. If you activate the function, all sent messages will be stored in your phone.

- i In standby mode, select **Menu > SMS > Settings**;
- ii Press the **Left/Right Key** to select **Yes** or **No**.

2. Set Storage Location



Notes:

- Skip this section if your phone does not support UIM card.
- The received messages could be stored either in phone or UIM card. You have the priority to select the storage location.
 - i In standby mode, select **Menu > SMS > Settings**;
 - ii Press the **Left/Right Key** to select **Phone First** or **UIM First**.

Preset Messages

Your phone has some preset messages in it. You can view, edit and send them directly.

1. View

- i In standby mode, select **Menu > SMS > Preset Msgs.**;
- ii Press the **Up/Down Key** to select the desired message;
- iii Select **View** to view the message.

2. Edit

- i Enter into the viewing interface (refer to *Preset Messages - View* for detail);
- ii Edit the message, and select **Option > Save** to save the edited message.

3. Send

- i Enter into the viewing interface (refer to *Preset Messages - View* for detail);
- ii Select **Option > Send to** to send the message (refer to *Send* for details);
- iii Select **Option > Back** to return to the **Preset Msgs.** interface.

Assistant

Alarm Clock

You can save up to five alarms in the phone.

Add

1. In standby mode, select **Menu > Assistant > Alarm Clock**;
2. Select **Add** to edit;
3. Press the **Up/Down Key** to scroll the highlight, and edit each highlighted item:
Time: Input alarm time, and press the **Left/Right Key** to switch between hour and minute;
Set: Press the **Left/Right Key** to turn on or off the alarm ring;
Week: Press the **Left/Right Key** to select the date on which alarm clock works;
Note: Enter the remarks;
4. Select **Save** to save the settings.

View / Edit

1. In standby mode, select **Menu > Assistant > Alarm Clock**;
2. Press the **Up/Down Key** to select the alarm you want to view;
3. Select **Option > View** to view the alarm, and you could also edit the alarm at this time (refer to *Add* for details).

Delete

1. In standby mode, select **Menu > Assistant > Alarm Clock**;
2. Press the **Up/Down Key** to select the alarm you want to delete;
3. Select **Option > Delete**, and select **Yes** to delete the alarm.

Set Alarm Ring

1. In standby mode, select **Menu > Assistant > Alarm Clock**;
2. Press the **Up/Down Key** to select the alarm you want to set alarm ring;
3. Select **Option > Set Alarm Ring**;
4. Press the **Up/Down Key** to select your desired ring.

Turn Off Alarm Ring

If the **Alarm Ring** is set as **On**, the alarm clock will ring as the time is up. At this point, select **OK** to turn off the ring.

Calculator

The phone provides a calculator, which you could use to perform basic math calculation.

1. In standby mode, select **Menu > Assistant > Calculator**;
2. Input numbers with **Number Keys**, press the *** Key** to input the decimal, and press **# Key** to negative the numbers, and press the **Navigation Keys** to input calculation symbols “+/-/×/÷”;
3. Select **Clear** to clear the input contents one by one;
4. Select **=** to figure out the result.

Calendar

View Event

1. In standby mode, select **Menu > Assistant > Calendar**;
2. Press the **Navigation Key** to select your desired date, and select **Option > View**;
3. Press the **Up/Down Key** to select the event you want to view, and select **Option > View Event** to view the complete contents, then you can select **Option > Send Via SMS** to send the event as a short message.

View All

1. In standby mode, select **Menu > Assistant > Calendar**;
2. Select **Option > View All**];
3. Press the **Up/Down Key** to select the event you want to view;
4. Select **Option > View Event** to view the complete content.

Add Event

1. In standby mode, select **Menu > Assistant > Calendar**;
2. Press the **Navigation Key** to select the date on which you want to add event, select **Option > Add Event**;
3. Enter the event content;
4. Select **Save** to save the event.

Goto

1. In standby mode, select **Menu > Assistant > Calendar**;
2. Select **Option > Goto**;
3. Input your desired data and select **Goto**
4. View the events on that day (refer to *View Event* for details).

Delete

1. View the events on that day (refer to *View Event*);
2. Press the **Up/Down Key** to select the event you want to delete, and select **Option > Delete**;
3. Select **Yes** to delete the event.

Delete All

1. In standby mode, select **Menu > Assistant > Calendar**;
2. Select **Option > View All** to view all events;
3. Select **Option > Delete All**, and select **Yes** to delete all events.

World Time

You could check the local time of major cities in the world.

1. In standby mode, select **Menu > Assistant > World Time**;
2. Press the **Navigation Key** to check the time of major cities in the world;
3. Select **Back** to return to the **Assistant** interface.

Stopwatch

As a time counter, the stopwatch could record up to 10 records once.

General Time Counting

1. In standby mode, select **Menu > Assistant > Stopwatch**;
2. Select **Start** to start counting;
3. Select **Pause** to stop counting;
4. Select **Cont.** to continue counting;
5. Select **Option > Clear** to clear the records.

Record Multiple Time Records in the Counting

1. In standby mode, select **Menu > Assistant > Stopwatch**;
2. Select **Start** to start counting;
3. During the counting, select **Record** to save the record (you could select **Record** up to ten times);
4. Select **Pause** to stop counting;
5. Select **Option > Check Records**, and press the **Up/Down Key** to view the records.

Settings

Profiles

In **Profiles**, you could set different sounds for different occasions.

Change Profile

1. Using # Key

- i Hold the **# Key** until the profile changes to your desired mode in standby mode;
- ii Release the **# Key** to activate the desired profile.

2. Using Menu

- i In standby mode, select **Menu > Profiles**;
- ii Press the **Up/Down Key** to select the mode you want to activate;
- iii Select **Option > Activate** to activate.

View / Edit Profile

1. In standby mode, select **Menu > Profiles**;
2. Press the **Up/Down Key** to select the mode you want to view;
3. Select **Option > View**;
4. Press the **Up/Down Key** and select **OK** to select the option you want to edit:

Ringtone/vib: press the **Left/Right Key** to select ringing mode and ring tone, and select **Save** to save the settings;

SMS Alert: press the **Left/Right Key** to select alert mode and alert tone, and select **Save** to save the settings;

PTT Voice: press the **Left/Right Key** to select PTT voice from **Speaker** or **Earpiece**, and set alert set and vibrate set as **on** or **Off**, and select **Save** to save the settings;

Volume: press the **Left/Right Key** to make settings to the volume of **Ringer**, **Earpiece**, **Key tone** and **SMS alert**, and select **Save** to save the settings;

Alert: press the **Left/Right Key** to activate or deactivate the alert of **Call Connected**, **Call Ended** and **1 minute**, and select **Save** to save the settings;



Notes: The incoming call ringtone is just for ordinary numbers. For those numbers in the groups of the phone book, the incoming call ringtone is the group ringtone you set in Book.

5. Select **Back** to return to the option interface.

Phone

Idle Display

1. In standby mode, select **Menu > Settings > Phone > Idle Display**;
2. Select **Wallpaper**, and press the **Up/Down Key** to select the desired wallpaper, and press **Select** to select it as the standby wallpaper;
3. Select **Banner**, edit the content and press **OK** to save;
4. Select **Date & Time**, press the **Left/Right Key** to display or conceal the **Date**, **Time** and **Week** in standby mode, and select **Save** to save the settings.

Backlight

1. In standby mode, select **Menu > Settings > Phone > Backlight**;
2. Press the **Up/Down Key** to select the lasting time for backlight;
3. Select **Cancel** to return to the **Phone** interface.

LCD Contrast

1. In standby mode, select **Menu > Settings > Phone > LCD Contrast**;
2. Use the **Left/Right Key** to set the contrast of screen, and select **Select** to save the setting;
3. Select **Cancel** to return to the **Phone** interface.

Language

1. In standby mode, select **Menu > Settings > Phone > Language**;
2. Select your desired language, and select **Select** to save the setting;
3. Select **Cancel** to return to the **Phone** interface.

Shortcuts

Set the function of quick entry in standby mode.

1. In standby mode, select **Menu > Settings > Phone > Shortcuts**;
2. Select **Left key** or **Right key**;
3. Select the desired function for the corresponding key, and select **Select** to save the settings;
4. Select **Cancel** to return to the **Shortcuts** interface.

Personal Info

Store your personal information.

1. In standby mode, select **Menu > Settings > Phone > Personal Info**;
2. Input your information and select **OK** to save the contents.

Time Format

1. In standby mode, select **Menu > Settings > Phone > Time Format**;

2. Press the **Up/Down Key** to select **AM/PM** or **24 Hours** as the time format.

Security

The phone password is needed to enter the **Security** interface. Generally, the default password is: "0000". Once you get a new phone, it is recommended to modify the password to guarantee the safety of information.

1. Require PIN



Notes: If your phone needs UIM card, please read the following contents; otherwise skip this section.

- i In standby mode, select **Menu > Settings > Security**;
- ii Input the password, and select **OK**;
- iii Select **Require PIN**;
- iv Press the **Up/Down Key** to select **On** or **Off**, and input the PIN code and select **OK** to activate the function. When it is set as **On**, the phone requires PIN code of UIM card to power on.

2. Change Password

- i In standby mode, select **Menu > Settings > Security**;
- ii Input the password, and select **OK**;
- iii Select **Change Password**;
- iv Enter the old password, and select **OK**;
- v Enter the new password, and select **OK**;
- vi Enter new password again, and select **OK**.
- vii Select **OK** to save it.

3. Change PIN

- i In standby mode, select **Menu > Settings > Security**;
- ii Input the password, and select **OK**;
- iii Select **Change PIN**;

- iv Enter the old PIN code, and select **OK**;
- v Enter the new PIN code, and select **OK**;
- vi Enter new PIN code again, and select **OK**;
- vii Select **OK** to save it.



Notes: The UIM card will be locked if you enter wrong PIN code three times. Then you need PUK code to unlock the UIM card. The PIN code and PUK code may be provided together with the UIM card. If not, contact your network service provider. It's recommended to change it as soon as possible.

Default Reset

After you select **Default Reset**, the phone settings will return to the factory default settings and the phone will automatically restart.

1. In standby mode, select **Menu > Settings > Default Reset**;
2. Select **Yes** to restore default settings.

Appendix

Fallback

Your phone has a fallback function. When there are some troubles on PTT system, the phone will activate fallback mode.

When the signal icon turns to the twinkling fallback icon, it means that the phone is in the fallback mode.

In fallback mode, the phone can only execute parts of PTT functions. The Group Calls such as the Normal Group Call and Emergency Group Call, Broadcast Call and Pre-emptive Group Call can work well, but some functions may not work.

Troubleshooting

Trouble	Possible Cause	Solution
Power-on Failure	Inadequate battery capacity	Charge the battery
	Poor battery contact	Re-install the battery
Auto Power-off	Seriously poor battery capacity	Recharge the battery
Inadequate Standby Time	Decreasing of battery performance	Replace the battery
	Poor network signal	Power off as network signal is poor
Network Connection Failure	Poor network signal	Move to other places
	Out of the service area	Confirm whether it is in the CDMA network service area

Trouble	Possible Cause	Solution
Call drop during a call	Poor network signal	Move to other places
No ring for a incoming call	The phone is set to Silence , or the ring volume is set to 0	Enter Profiles and change the mode; or check the ring volume
Prompt to input PUK	UIM card is locked due to successive inputting false PIN code for three times	Contact the operators